

SUPPLY SCOPE: Nudura 8in Standard ICF forms and accessories with the BuildEase pre-cut service, as the Distributor BOM (distributor sets its own rates). Haulage to Bosnia and Herzegovina by BuildEase Logistics quote (TBC). Alignment not included. ICF starts on the slab. Slabs, roof, stair, partitions, windows and doors are drawn in good faith for coordination only (by others / engineer); finishes by others - external finish and window tape quantities are a take-off only). Local building regulations and structural design by the client's engineer.

QUOTATION - NOT FOR CONSTRUCTION

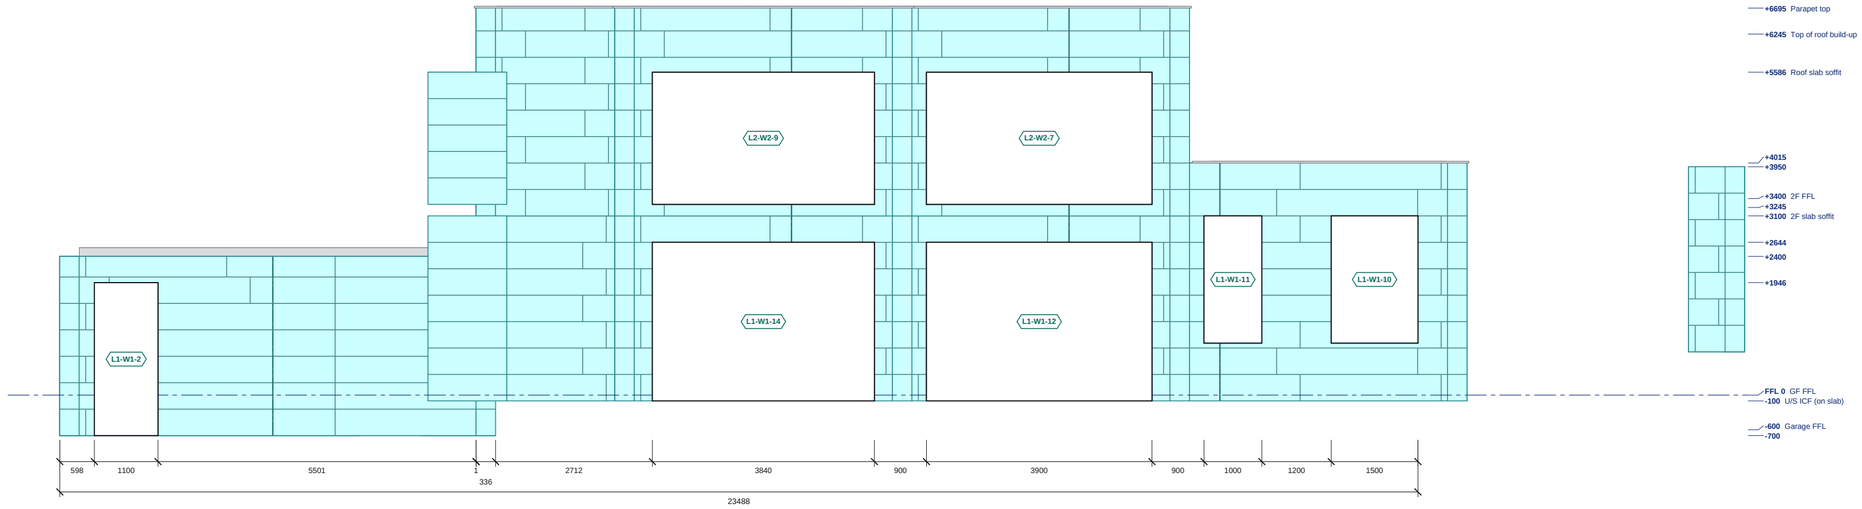

EAST ELEVATION

Scale 1:75 @ A2 | Levels above GF FFL; sills and heads in the schedule

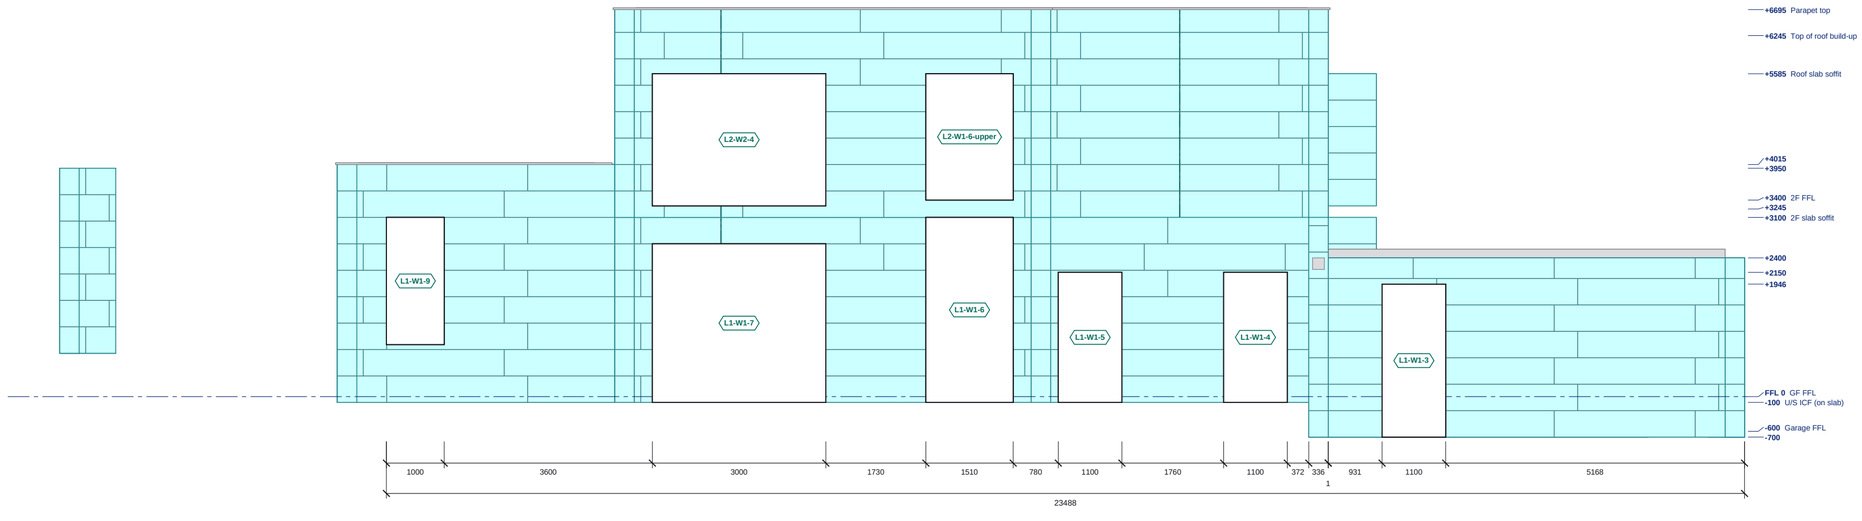

WEST ELEVATION

Scale 1:75 @ A2 | Levels above GF FFL; sills and heads in the schedule

0 1 2 3 4m

ICF external EPS face
Block course joint
Stack joint
Roof build-up (slab / earth / sedum)
GF slab + foundation build-up, ACO

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

EAST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-W1-14	3840	2743	-100	+2643	-
L1-W1-12	3900	2743	-100	+2643	-
L1-W1-11	1000	2200	+900	+3100	-
L1-W1-10	1500	2200	+900	+3100	-
L1-W1-2	1100	2645	-700	+1945	-
L2-W2-9	3840	2285	+3300	+5585	-
L2-W2-7	3900	2285	+3300	+5585	-

Structural openings in the ICF; sill and head above GF FFL.

WEST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-W1-6	1510	3200	-100	+3100	-
L1-W1-7	3000	2743	-100	+2643	-
L1-W1-3	1100	2645	-700	+1945	-
L1-W1-5	1100	2250	-100	+2150	-
L1-W1-4	1100	2250	-100	+2150	-
L1-W1-9	1000	2200	+900	+3100	-
L2-W2-4	3000	2285	+3300	+5585	-
L2-W1-6-upper	1510	2185	+3400	+5585	-

Structural openings in the ICF; sill and head above GF FFL.

EAST ELEVATION: LEVELS

Level	FFL
underside of ICF	-700
Garage FFL	-600
U/S ICF (on slab)	-100
GF FFL	0
top of ICF	+1946
top of ICF	+2400
top of ICF	+2644
2F slab soffit	+3100
top of roof build-up	+3245
2F FFL	+3400
top of ICF	+3950
top of ICF	+4015
Roof slab soffit	+5586
Top of roof build-up	+6245
Parapet top	+6695

WEST ELEVATION: LEVELS

Level	FFL
underside of ICF	-700
Garage FFL	-600
U/S ICF (on slab)	-100
GF FFL	0
top of ICF	+1946
top of ICF	+2150
top of ICF	+2400
2F slab soffit	+3100
top of roof build-up	+3245
2F FFL	+3400
top of ICF	+3950
top of ICF	+4015
Roof slab soffit	+5585
Top of roof build-up	+6245
Parapet top	+6695

NOTES

1. ICF: Nudura 8" Std, 66.7 EPS + 203.2 core + 66.7 EPS = 336.6. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Roof build-up, masonry and ground floor build-up shown as modelled.
4. See ES26-086-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Tremco CPG Poland	Villa Bosnia - Nudura model house, Bosnia and Herzegovina

DRAWING TITLE
EAST AND WEST ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:75	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-086-EL-02	-